



Description:

The fibers, 250 μ m, are positioned in a loose tube made of a high modulus plastic. The tubes are filled with water-resistant thixotropic jelly. A steel wire, sometimes sheathed with polyethylene for cable with high fiber count, locates in the center of core as a metallic strength member. Tubes (and fillers) are stranded around the strength member into a compact and circular cable core. The PSP is longitudinally applied over the cable core, which is filled with the filling compound to protect it from water ingress. The cable is completed with a black PE or LSOH sheath.

Features:

- Good mechanical and temperature performance
- High strength loose tube that is hydrolysis resistant
- Special tube filling compound ensure a critical protection of fiber
- Crush resistance and flexibility
- Compact structure design to prevent loose tube from shrinking


Compliances:

- ITU-T G651 / ITU-T G652D
- ANSI/TIA568-C.3, EIA/TIA 492
- IEC-60793, IEC-60794
- RoHS
- IEC 60332-1

Applications:

- Suitable for direct buried, aerial or duct installation

Drawing:

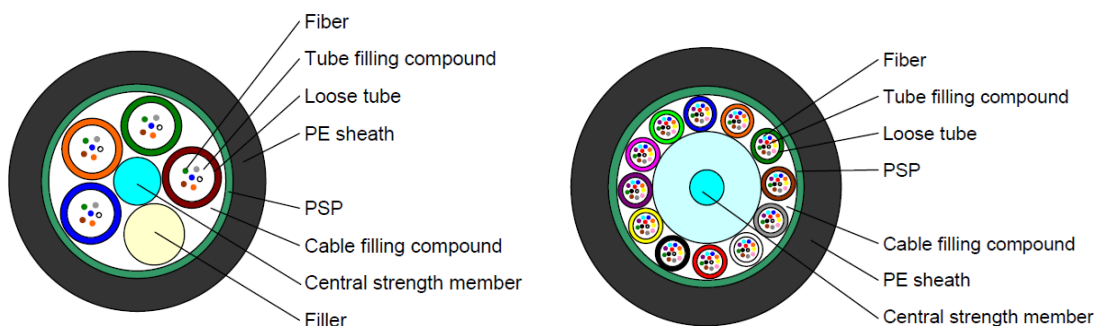

Note: Drawings are the 24 Fibers and 144 Fibers PE sheath cable as examples

Structure & Environmental Characteristics:

Loose Tube	Material	PBT
Strength Member	Material	Steel Wire
	Material	Corrugated Steel Tape
Moisture Barrier	Material	Cable Jelly
Sheath	Material	PE/LSOH, black
Operating Temperature	-40°C to +70°C	
Storage / Transport Temperature	-40°C to +70°C	
Installation Temperature	-40°C to +70°C	

Mechanical Characteristics:

Fiber Count	Tubes	Fillers	Fiber Count	Outside Diameter (mm)	Cable Weight (kg/km)	Tensile Load		Crush Load	
						Short Term	Long Term	Short Term	Long Term
						(N)	(N)	(N)	(N)
2C	1	4	2	9.2±0.5mm	103	1500	600	1000	300
4C	1	4	4	9.2±0.5mm	103	1500	600	1000	300
6C	1	4	6	9.2±0.5mm	103	1500	600	1000	300
8C	2	3	4	9.2±0.5mm	103	1500	600	1000	300
12C	2	3	6	9.2±0.5mm	103	1500	600	1000	300
24C	4	1	6	9.2±0.5mm	103	1500	600	1000	300
36C	6	0	6	9.7±0.5mm	122	1500	600	1000	300
48C	4	1	12	10.2±0.5mm	126	1500	600	1000	300
72C	6	0	12	11.0±0.5mm	146	1500	600	1000	300
96C	8	0	12	12.6±0.5mm	176	1500	600	1000	300
144C	12	0	12	15.5±0.5mm	248	1500	600	1000	300

* Bend Radius: static (10D), dynamic (20D), "D" is cable diameter.

Fiber Color Code:

No. of fiber	1	2	3	4	5	6
Color of fiber	Blue	Orange	Green	Brown	Grey	White
No. of fiber	7	8	9	10	11	12
Color of fiber	Red	Black	Yellow	Violet	Pink	Aqua

Loose Tube Color Code:

No. of tube	1	2	3	4	5	6
Color of tube	Blue	Orange	Green	Brown	Grey	White
No. of tube	7	8	9	10	11	12
Color of tube	Red	Black	Yellow	Violet	Pink	Aqua

Optical Performance:

	Wavelength	9/125μm	50/125μm	62.5/125μm	50/125μm(OM3)	50/125μm(OM4)
Max. Attenuation dB/km	850 / 1300nm	--	≤ 3.2 / ≤ 1.2	≤ 3.2 / ≤ 1.2	≤ 3.2 / ≤ 1.2	≤ 3.2 / ≤ 1.2
	1310 / 1550nm	≤ 0.36 / ≤ 0.22	--	--	--	--
Minimum Bandwidth MHz· km	850 / 1300nm	--	500 / 500	200 / 500	1500 / 500@LED	3500 / 500@LED
					2000 / 500@Laser	4700 / 500@Laser

Ordering Information:

Part No. 2652xyzzz

Description Premium Line Fiber optic outdoor cable, steel armored with central steel
wire strength member, Multi-tube

x, mode 1: MM 62.5/125 2: SM 9/125 3: MM 50/125 4: MM/OM3 9: MM/OM4

y, outer sheath 2: LSOH 3: PE

zzz, fiber count 002 / 004 / 006 / 008 / 012 / 024 / 036 / 048 / 072 / 096 / 144

Packing Information:

1. cable be wound on an iron stand-wooden composite
2. standard drum length is 2000m ±1%
3. covered by plastic buffer sheet
4. sealed by strong wooden battens
5. at least 1.1m of inner end of cable should be reserved for testing
6. test protocol at side of the drum

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany**► TEL: +49(0)8035 9836 0 ► Fax: +49(0)8035 9836 22**