



We provide our customers with exceptional PRODUCTS in accordance with the highest international standards and also provide SERVICES that meets our customers' needs or exceeds their expectations.


Powered by: **PROLINK**

Discription

Prolink F/O JUMPER CORD, SC-SC OS2 DUPLEX-3M

Features

-  Small Size, High Precision.
-  Zirconia 1.25mm ceramics ferrule.
-  Low insertion Loss.
-  High Return Loss.
-  Duplex are Available.

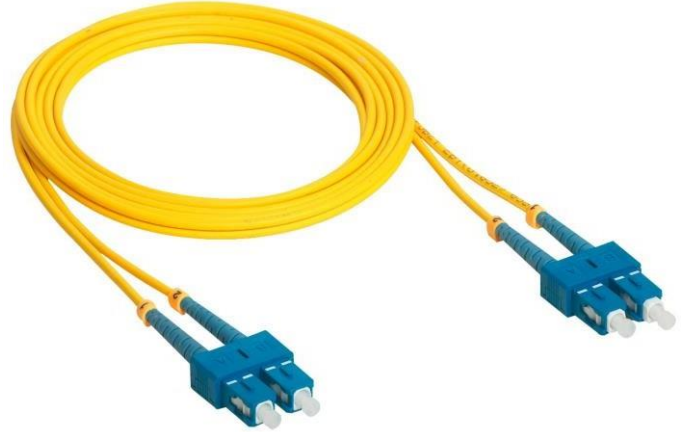

Applications

-  Telecom and Datacom Equipment.
-  LAN/WAN
-  Device Terminals

Specifications

Connectors type	SC-SC
Cable	OS2 Duplex 3.0 LSZH 3M
Fiber Type	SM 9/125
Cable Color	Yellow
Insertion Loss	-0.3 dB
Return Loss	≥45dB
Joint Endurance	> 1000Times
Operating Temperature	-40°C~+70°C
Storage Temperature	-25°C~+60°C
ROHS	Meet 2002/95/EC Requirement